≪CP PLUS

CP PLUS

Smart Door Sensor








Wi-Fi Support

Powered by the Interntet-of-Things, this door sensor connects with the home Wi-Fi and enables the user to gain complete control over their home.

2.4GHz Wi-Fi Range

Developed with an amplified Wi-Fi range so that you can give every part of the house the same attention when it comes to installing safety protocols.



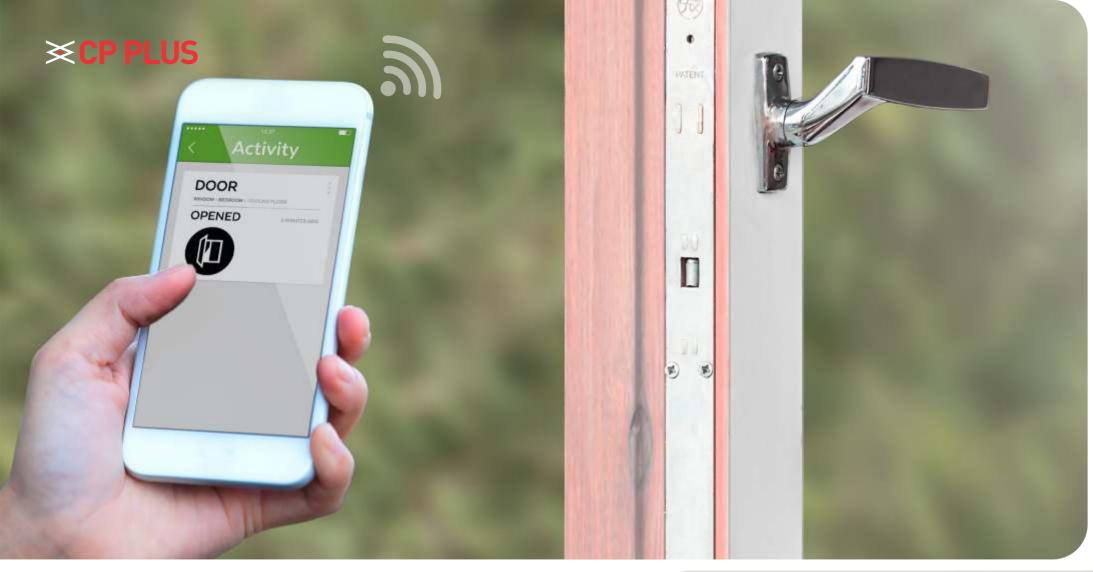

Easy to use

So easy to operate and control, this door sensor is the most convenience-friendly device for ensuring protection against intruders or unexpected visitors.

Can be installed on Window & Doors

Detecting motion in real-time to send alerts and keep you notified, this sensor can be installed on windows and/or doors for enhanced security.






Detection Distance

20-30mm - Designed to provide enhanced security, this door sensor detects and considers more than 30mm wide opening as open door and alerts in real-time.

Real-Time Alert

Keeping you alert only when the need occurs, this door sensor has been integrated with the Ezykam+ mobile app where the users can receive alerts in real-time.

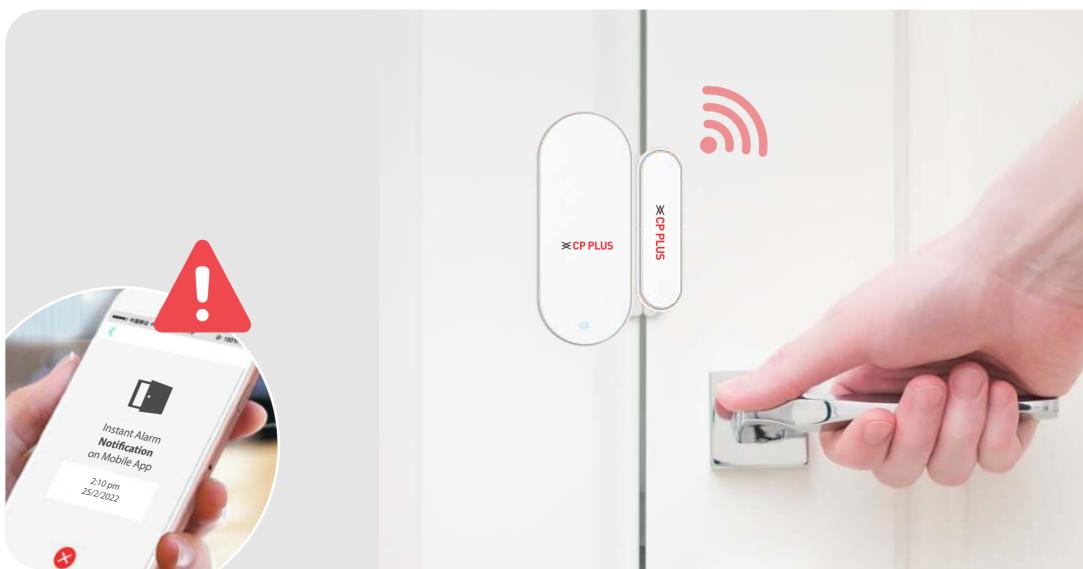



Plug & Play

Quite easy to install and start using, this door sensor requires no installation hassles. Just plug the device, connect it to the Wi-Fi and you are good to go.

Low Battery Alert

Ensuring that your door sensor is always working effectively and never runs out of battery, it also sends low-battery alerts to the user's smartphones





Specification - CP-HAS-D33-W

Feature	Specification
Working Voltage	DC 3V(CR2x1)
Detection Distance	20-30mm
Wi-Fi Networking	2.4 GHz
Wi-Fi Protocol	IEEE 802.11 b/g/n
Working Temperature	-10 ~+50°C
Working Humidity	?95% RH (no condensation)
Detector Dimension	72mm x 21mm x 26mm
Magnet Dimension	35mm x 11mm x 13mm



Applications











Hospitality

Office

Home

Retail Shops

School

CIN No.: U74899DL1995PLC066784