


CP- UNC-VD41L3-VMD**4MP WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 4Megapixel PS CMOS Image Sensor (0.84667cm)
- 25/30fps@4M(2688x1520)
- Instastream, H.265 and H.264 Triple - stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

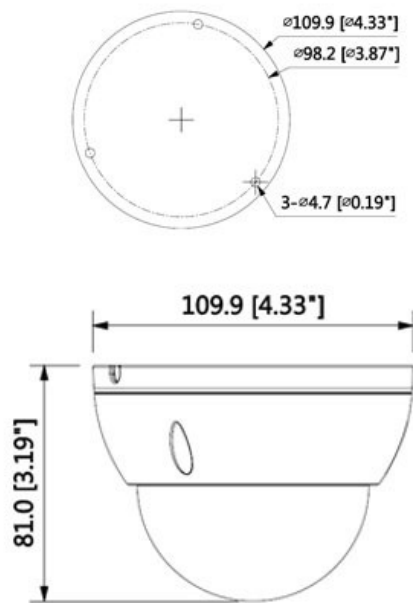

CP- UNC-VD41L3-VMD

4MP WDR IR Vandal Dome Camera - 30Mtr.

Feature	Specification
Image Sensor	1/3" 4Megapixel progressive scan CMOS (0.84667cm)
Minimum Illumination	0.08Lux/F2.0 (Color), 0Lux/F2.0 (IR on)
Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
White Balance	Auto/Manual
Gain Control (AGC)	Auto/Manual
Lens	3.6mm(2.8mm, 6mm optional)
Video Compression	Instastream/H.265/H.264+/H.264
Back Light Compensation	BLC / HLC / WDR(120dB)
S/N Ratio	More than 50dB
Video Streaming	Main Stream: 4M(1~25/30fps), Sub Stream D1/CIF(1~25/30fps), Third Stream: 720P(1~25/30fps)
Resolution	4M(2688×1520) / 3M(2304×1296) / 1080P(1920×1080) / 1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / VGA(640×480) / CIF(352×288/352×240)
Digital Zoom	16x
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Up to 4 areas
ICR	Auto (ICR)/Color/B/W
ROI	Off / On (4 Zone)
Audio Input	1 Ch.
Audio Compression	G.711a/ G.711Mu/ AAC/ G.726
Audio Output	1 Ch.
Alarm IN	1 Ch.
Alarm Out	1 Ch.
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP;IGMP; SNMP,ONVIF, PSIA, CGI
Smart Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
Ethernet	RJ-45 (10/100Base-T)
User/Host	20 Users
IR	IR Range of 30 Mtr.
Smart Phone	IOS, Android
Micro SD	Micro SD, Max 128GB

CP- UNC-VD41L3-VMD**4MP WDR IR Vandal Dome Camera - 30Mtr.****Feature**

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

-30°C~+60°C, Less than 95% RH

DC12V, PoE (802.3af)

Max 5W

IP67 & IK10

Φ109.9mm × 81mm (4.33"×3.19")

0.41kg