


**CP- UNC-TH4K121ZR5-VM****12 MP 4K IP IR Bullet Camera - 50Mtr.****Main Features**

- 1/1.7" 12 MP PS CMOS Image Sensor
- Max 20fps@12Mp, 25/30fps@4K
- H.265, H.264 triple-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, EIS, ROI, AWB, AGC, BLC
- 4.1 -16.4mm Motorized Lens
- IR Range of 50 Mtrs, IP67, IK10, PoE Plus
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

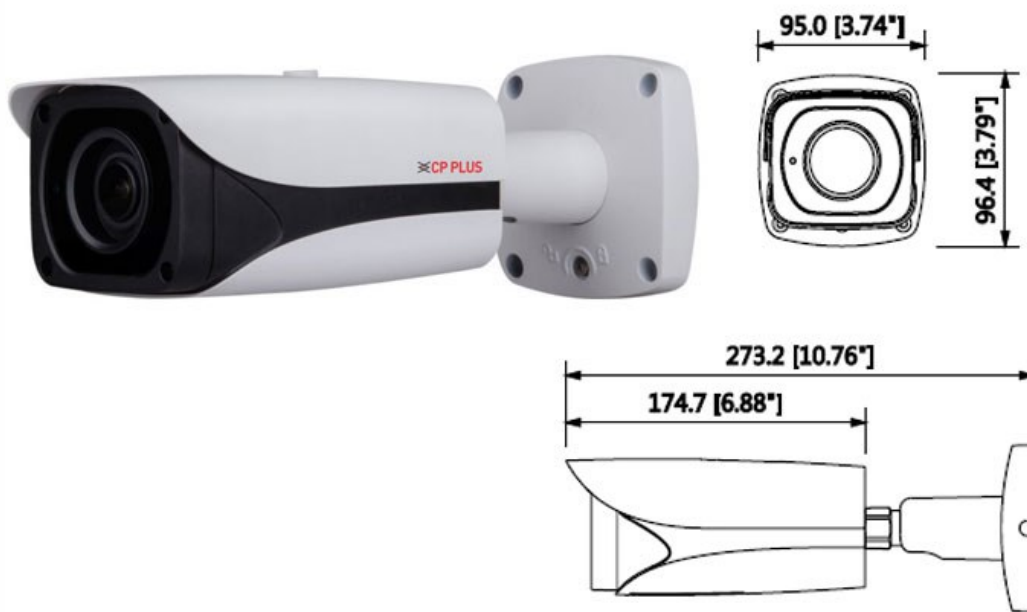

# CP-UNC-TH4K121ZR5-VM

## 12 MP 4K IP IR Bullet Camera - 50Mtr.



### Feature

Image Sensor  
 Effective Pixels  
 Minimum Illumination  
 Angle of View  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 S/N Ratio  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Input  
 Audio Output  
 Audio Compression  
 Alarm IN  
 Alarm Out  
 Bit Rate  
 Protocol  
 Smart Detection  
 Ethernet  
 User Account  
 IR

### Specification

1/1.7" 12MP CMOS  
 4000(H) x 3000(V)  
 0.01Lux/F1.53(Color,1/3s,30IRE) 0.1Lux/F1.53(Color,1/30s,30IRE) 0Lux/F1.53(IR on)  
 H: 85°~35°, V:63°~26°  
 Auto/Manual, 1/3~1/100000s  
 Auto/Sunny/Night/Outdoor/Customized  
 4.1 - 16.4mm Motorized  
 Auto/Manual  
 H.265+/H.265/H.264+/H.264  
 More than 50dB  
 BLC / HLC / DWDR/ SSA  
 Main Stream: 12M(1~20fps)/ 4K(1~25/30fps), Sub Stream: D1 (1 ~ 25/30fps), Third Stream: 1080P(1~25/30fps)  
 12M(4000x3000)/8M(4096x 2160)/8M(3840x 2160)/1080P(1920x 1080)/720P(1280x 720) / D1(704x 576) /CIF(352x 288)  
 16x  
 Off / On (4 Zone, Rectangle)  
 Off / On (4 Area, Rectangle)  
 Auto (ICR)/Color/B/W  
 Off / On (4 Zone)  
 1 Channel  
 1 Channel  
 G.711a/G.711Mu/AAC/ G.726  
 2 Channel In  
 1 Channel Out  
 H.264: 24~ 16384Kbps, H.265: 14~ 9984Kbps  
 HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour;802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI  
 Tripwire, Intrusion, Object Abandoned/Missing, Face Detection, People Counting, Heat Map  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 50 Mtr.



**CP- UNC-TH4K121ZR5-VM****12 MP 4K IP IR Bullet Camera - 50Mtr.****Feature**

Smart Phone  
Special Features  
Micro SD  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

**Specification**

iPhone, iPad, Android Phone  
Supports EIS, Defog  
Micro SD card 128GB  
-40°C~+60°C , Less than 95%RH  
DC12V, PoE+(802.3at)  
<13W  
IP67 & IK10  
273.2mm×95.0mm×96.4mm  
1.12Kg