
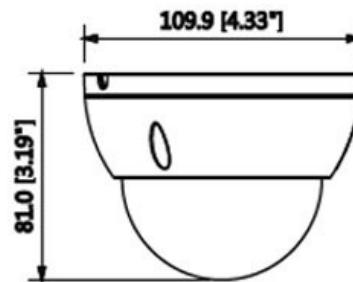


CP-UNC-VA41L3-D**4 MP WDR Network IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max. 20fps@4MP, Max. 25/30fps@3MP
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8 mm fixed lens (3.6 mm optional)
- IR Range of 30 Mtrs, IP67,IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

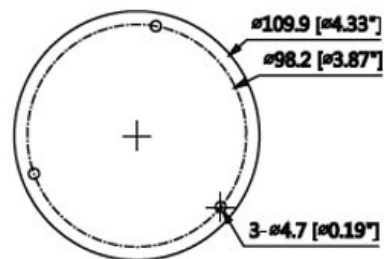

CP-UNC-VA41L3-D

4 MP WDR Network IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
 Minimum Illumination
 Effective Pixels
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Angle of View
 Video Compression
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Resolution
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR
 Smart Phone
 Ingress Protection
 Operating Temperature
 Power Source
 Power Consumption

Specification

1/3" 4MP Progressive scan CMOS
 0.08Lux/F2.0(Color,1/3s,30IRE) 0.3Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
 2688(H) x 1520(V)
 Auto/Manual, 1/3~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 2.8mm (3.6mm optional)
 Auto/Manual
 H:104°/87°, V:57°/48°
 H.265+/H.265/H.264+/H.264
 More than 50dB
 BLC / HLC / WDR(120dB)
 Main Stream: 4MP(1 ~ 20fps)/3MP(1 ~ 25fps),Sub Stream: D1/CIF(1 ~ 20fps), Third Stream: 720P(1 ~ 15fps)
 4M(2688x1520/2560x1440)/3M(2304x1296)/ 1080P(1920x1080)/720P(1280x720)/ D1 (704x576/704x480)/ CIF(352x288/352x240)
 16x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR) / Color / B/W
 Off / On (4 Zone)
 H.265: 12K ~ 8448Kbps , H.264: 32K ~ 10240Kbps
 HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; SNMP; QoS; UPnP; NTP; ONVIF, PSIA, CGI
 Tripwire, Intrusion
 RJ-45 (10/100Base-T)
 20 Users
 IR Range of 30 Mtr.
 iPhone, iPad, Android Phone
 IP67 & IK10
 -30°C~+60°C , Less than 95%RH
 DC12V, PoE (802.3af)
 <4.6W



CP- UNC-VA41L3-D**4 MP WDR Network IR Vandal Dome Camera - 30Mtr.****Feature**

Casing

Dimension

Weight

Specification

Metal

Φ109.9mm x 81mm

0.34Kg