
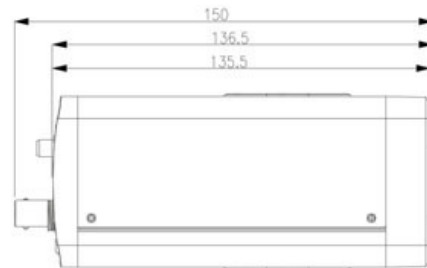


**CP- UNC-BE20-M****2 MP Full HD IP Box Camera****Main Features**

- 1/2.8" 2Megapixel PS CMOS Image Sensor
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1080P(1920×1080)
- DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- Max 64GB Micro SD Card for Local Storage
- C/CS Mount Lens
- Supports PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

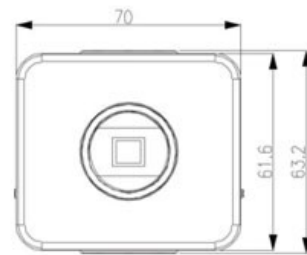

# CP-UNC-BE20-M

## 2 MP Full HD IP Box Camera

### Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control(AGC)  
 Video Compression  
 S/N Ratio  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Privacy Mask  
 ICR  
 Audio Input  
 Audio Output  
 Audio Compression  
 Alarm IN  
 Alarm Out  
 Interface  
  
 Protocol  
  
 Ethernet  
 User Account  
 Smart Phone  
 Micro SD  
 Operating Temperature  
 Power Source  
 Power Consumption  
 Regulatory  
 Dimension  
 Weight

### Specification

1/2.8" 2Megapixel CMOS  
 Color: 0. 1Lux / F1.2, B/W: 0.01Lux/F1.2  
 Auto/Manual, 1/3(4)~1/10000s  
 Auto  
 C/CS Mount Lens  
 Auto/Manual  
 H.264/MJPEG  
 More than 50 dB  
 BLC / HLC / DWDR  
 Main Stream:1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
 1080P(1920×1080) /720P(1280×720) /D1(704×576) / CIF(352×288)  
 Up to 4 areas  
 Auto(ICR)/Color/B/W  
 1 Ch.  
 1 Ch.  
 G.711a / G.711u / PCM  
 1 Ch.  
 1 Ch.  
 1 RS485, 1 RJ45  
  
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S  
  
 RJ-45 (10/100Base-T)  
 10 users  
 iPhone, iPad, Android, Windows Phone  
 Micro SD, Max 64GB  
 -10°C~+60°C, ≤90%  
 DC12V/AC24V, PoE(802.3af)  
 <3.5W  
 CE, FCC and RoHS  
 70mm×63.2mm×149.5mm  
 650g