


**CP- UNC-VA81L3-MDS****8MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2" 8MP PS CMOS Image Sensor
- 25/30fps@8MP(3840×2160)
- Support Starlight Function
- H.265 and H.264 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 4mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

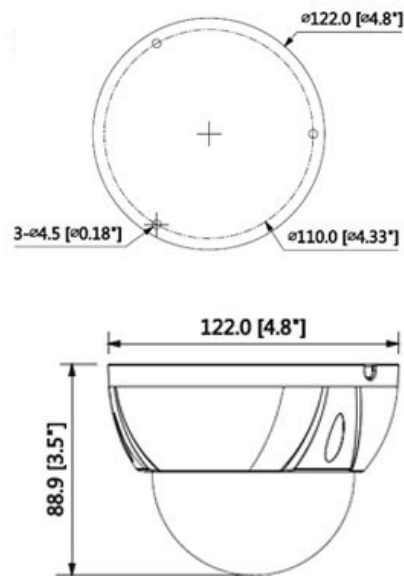

# CP- UNC-VA81L3-MDS

8MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Effective Pixels  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 Angle of View  
 S/N Ratio  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Bit Rate  
 Protocol  
 Smart Detection  
 Ethernet  
 Event Trigger  
 User Account  
 Smart Phone  
 IR  
 Micro SD

## Specification

1/2" 8MP Progressive scan CMOS  
 0.003Lux/F1.6( Color,1/3s,30IRE) 0.02Lux/F1.6 Color,1/30s,30IRE) 0Lux/F1.6(IR on)  
 3840(H) x 2160(V)  
 Auto/Manual, 1/3~1/100000s  
 Auto/Natural/Street Lamp/Outdoor/Manual  
 4mm (6mm optional)  
 Auto/Manual  
 H.265+/H.265/H.264+/H.264H/MJPEG (Sub Stream)  
 H:87°/55°, V:47°/30°  
 More than 50dB  
 BLC / HLC / WDR(120dB)  
 Main Stream: 4K (1~25/30fps) Sub Stream: D1(1~25/30fps)  
 4K(3840x2160)/6M(3072x2048)/5M(2560x1920)/ 3M(2048x1536)/3M(2304x1296)/ 1080P  
 (1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480) /VGA(640x480)/CIF  
 (352x288/352x240)  
 16x  
 Off / On (4 Zone, Rectangle)  
 Off / On (4 Area, Rectangle)  
 Auto (ICR)/Color/B/W  
 Off / On (4 Zone)  
 H.264:32Kbps~8192Kbps, H.265: 16Kbps~8192Kbps  
 HTTP; HTTPS;TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPV4/V6;  
 QoS; UPnP; NTP; Bonjour; IEEE 802.1X; Multicast; ICMP; IGMP; TLS; SSH; NFS; ONVIF Profile  
 S&G, API  
 Tripwire, Intrusion  
 RJ-45 (10/100Base-T)  
 Motion detection, Video tampering, Scene changing, Network disconnection, IP address  
 conflict, Illegal access, Storage anomaly  
 20 Users  
 iPhone, iPad, Android Phone  
 IR Range of 30 Mtr.  
 Micro SD Card 128GB



**CP- UNC-VA81L3-MDS****8MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Casing  
Dimension  
Weight

**Specification**

-30°C~+60°C , Less than 95%RH  
DC12V PoE(802.3af)  
<8.9W  
IP67 & IK10  
Metal  
φ122mm×88.9mm(4.80"×3.50")  
0.45Kg