
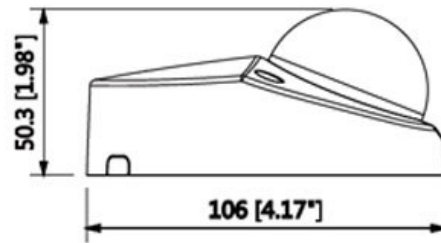


CP- UNC-WD41L2-VMD

4 MP Full HD WDR IR Dome Camera - 20Mtr.

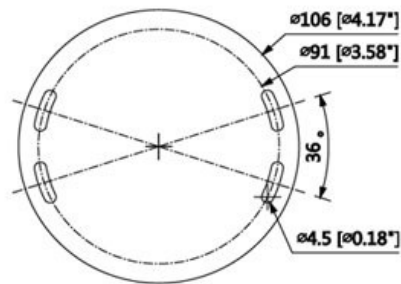

Main Features

- 1/3" 4MP PS CMOS Image Sensor
- 25/30fps@4MP(2688x1520)
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 2.8mm fixed lens (3.6mm, 6mm optional)
- IR Range of 20 Mtrs, IP67, IK10, SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-WD41L2-VMD

4 MP Full HD WDR IR Dome Camera - 20Mtr.



Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Video Compression

Back Light Compensation

S/N Ratio

Video Streaming

Resolution

Digital Zoom

Motion detection

Privacy Mask

ICR

ROI

Audio

Audio Compression

Bit Rate

Protocol

Smart Detection

Ethernet

User Account

IR

Smart Phone

Micro SD

Operating Temperature

Power Source

Specification

1/3" 4MP progressive scan CMOS

2688(H) x 1520(V)

0.08Lux/F2.0(Color,1/3s,30IRE) 0Lux/F2.0(IR on)

Auto/Manual, 1/3(4)~1/100000s

Auto/Natural/Street Lamp/Outdoor/Manual

2.8mm (3.6mm, 6mm optional)

Auto/Manual

H.265+/H.265/H.264+/H.264

BLC / HLC / WDR(120dB)

More than 50dB

Main Stream: 4MP(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 720P(1~25/30fps)

4MP(2688x1520)/3MP(2304x1296)/ 1080P(1920x1080)/1.3MP(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA(640x480)/CIF(352x288/352x240)

16x

Off / On (4 Zone, Rectangle)

Off / On (4 Area, Rectangle)

Auto(ICR)/Color/B/W

Off / On (4 Zone)

Built-in Mic

G.711a/ G.711Mu/ AAC/ G.726

H.264: 24~10240Kbps, H.265: 14~9984Kbps

HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP; ONVIF, PSIA, CGI

Tripwire, Intrusion, Object Abandoned/Missing, Face detection

RJ-45 (10/100Base-T)

20 Users

IR Range of 20 Mtr.

iPhone, iPad, Android

Max 128GB

-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH

DC12V, PoE (802.3af)



CP- UNC-WD41L2-VMD

4 MP Full HD WDR IR Dome Camera - 20Mtr.



Feature

Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

<4.5W
IP67 & IK10
Φ106mm x 50.3mm (4.17"×1.98")
0.4kg